


The SW400 has been designed by Albright for use in telecommunication and power distribution applications where the load is infrequently switched. These contactors are primarily for use with Direct Current loads, however they can also be used with Alternating Currents.

Uninterrupted current - no or infrequent load switching requirements (maintains a lower contact resistance).

 Uninterrupted current - no or infrequent load swite 					
Application	Uninterrupted				
Thermal Current Rating (^I th)	400A				
Intermittent Current Rating:					
30% Duty	730A				
40% Duty	630A				
50% Duty	565A				
60% Duty	515A				
70% Duty	480A				
Rated Fault Current Breaking Capacity (^I cn) Resistive Load: (in accordance with UL508*)					
SW400	600A at 60V D.C.				
Maximum Recommended Contact V	/oltages (U _e):				
SW400	60V D.C.				
Typical Voltage Drop per pole across New Contacts at 400A	50mV				
Mechanical Durability	>1 x 10 ⁶ Cycles				
Coil Voltage Available (U _S) (Rectifier board required for A.C.)	From 6 to 240V A.C./D.C.				
Coil Power Dissipation:					
Highly Intermittent Rated Types	40 - 50 Watts				
Intermittently Rated Types	30 - 40 Watts				
Prolonged Rated Types	15 - 30 Watts				
Continuously Rated Types	10 - 15 Watts				
Maximum Pull-In Voltage (Coil at 20° C) Guideline:					
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% U _s				
Intermittently Rated types (Max 70% Duty Cycle)	60% U _S				
Prolonged Operation (Max 90% Duty Cycle)	60% U _s				
Continuously Rated Types (100% Duty Cycle)	66% U _s				
Drop-Out Voltage Range	10 - 30% U _S				
Typical Pull-In Time 15ms					
Typical Drop-Out Time (N/O Contacts to Open):					
Without Suppression	6ms				
With Diode Suppression	35ms				
With Diode and Resistor (Subject to resistance value)	20ms				
Typical Contact Bounce Period	< 5ms				
Operating Ambient Temperature	- 40°C to + 60°C				
Guideline Contactor Weight:					
SW400	880 gms				
With Auxiliary	+ 20 gms				
Auxiliary I	Details				
Auxiliary Thermal Current Rating	5A				
Auxiliary Contact Switching Capa	bilities (Resistive Load):				
SW400A	SW400C				
5A at 24\	/ D.C.				
04 -+ 40	/ D.C.				
2A at 48V	1.3A at 72V D.C.				
	V D.C.				
1.3A at 72 Advised Connection Sizes for Ma					
1.3A at 72	ximum Continuous Current 258mm² [0.39inch²]				
1.3A at 72 Advised Connection Sizes for Ma. Copper busbar	ximum Continuous Current				

The SW400 has double breaking main contacts with silver alloy tips which are weld resistant, hard wearing and have excellent conductivity. This compact contactor can be busbar mounted vertically or horizontally, however if mounted vertically, the coil should be at the bottom. If the coil is required at the top, we can adjust the contactor to compensate for this. Optional extras for the SW400 include auxiliary switches, brackets, coil finishes and magnetic latching - allows the contactor to remain closed while consuming no coil power. Additionally, silver plating on the main contacts is specified as standard (option for no silver plating is also available).





25.4 [1.00]

16 [0.63]

64 2.53 0

6.3mm [0.25]

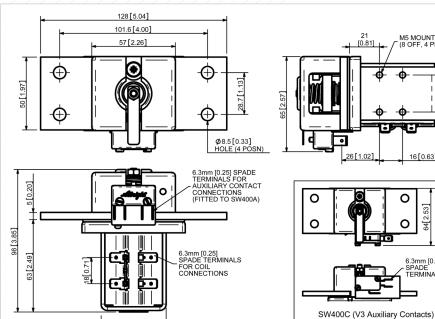

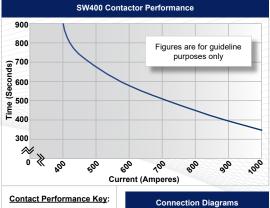

Drawing shows SW400A

Uninterrupted Current

rrent (Amperes)					
Connection Diagrams					
SW400A SW400C					
AUXILIARY CONTACT NO NC NC NC NO 2 4					

Dimensions in mm [inches]			
	SW400 Available Optio	ns	
	General		Suffix
	Auxiliary Contacts	0	Α
	Auxiliary Contacts - V3	0	С
	Magnetic Blowouts†	X	
	Magnetic Blowouts - High Powered [†]	X	
	Armature Cap	X	
	Mounting Brackets (see Busbar Series Catalogue)	0	
	Magnetic Latching [†] (Not fail safe)	0	M
	Closed Contact Housing	X	
	Environmentally Protected IP66	X	
	EE Type (Steel Shroud)	X	
	Contacts		
	Large Tips	X	
	Textured Tips	0	Т
	Silver Plating (fitted as standard)	0	
	Coil		
	AC Rectifier Board (Fitted)	0	
	Coil Suppression [†]	0	
	Flying Leads	0	F
	Manual Override Operation	0	
	M4 Stud Terminals	X	
	M5 Terminal Board	0	
	Vacuum Impregnation	0	
	Key: Optional ○ Standard • N	lot Availab	ole X

† Connections become polarity sensitive

* Please check our web site for product UL status

Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.

For further technical advice email: technical@albrightinternational.com Albright reserve the right to change data without prior notice

Thermal current ratings stated are dependant upon the size of conductor being used